


G-3288-01

产品特点:

- ◆ 采用瑞芯微RK3288 4核64位Cortex A17 处理器
- ◆ 2G DDR内存，最大支持4GB
- ◆ eDP/LVDS/MIPI支持双屏同步/异步显示
- ◆ 1×USB OTG，10×USB2.0，4×COM，1×RJ45 LAN
- ◆ 1×Mini-PCIe (支持3G/4G)
- ◆ 适用于零售、自助、一体机、工业控制等行业

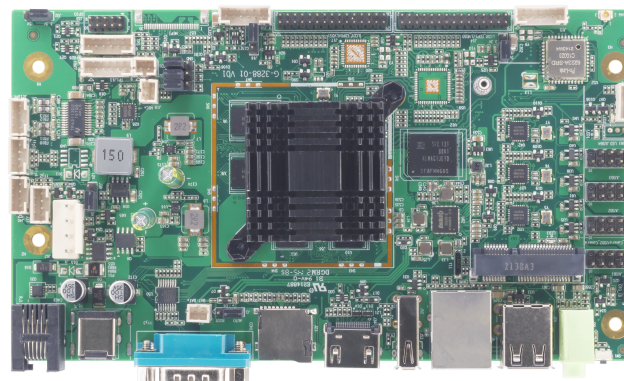

产品规格:

Processor System	
CPU	RK3288, ARM Cortex A17, Quad-core, 1.8 GHz
GPU	Controller Mali-T764 Frequency 600 MHz
Memory	
Type	DDR3L (2GB)
Capacity	2GB(Up to 4 GB)
Display	
eDP	2×eDP Port
HDMI	1×HDMI Port, Up to 4K*2K Multiple Display
LVDS	2×LVDS Port (LVDS 与 eDP 二选一)
MIPI	1×MIPI_DSI
Storage	
eMMC	Capacity 8GB(Up to 64 GB)
COM	
Port Number	4
Mode	2×rs232, 1×TTL, 1×rs485
PWR	可选 5V/12V 供电
Touch panel	
Port	I2C Interface and USB Interface
Ethernet	
RJ45	10/100 Mbps
Wifi/ Bluetooth	
Wifi	802.11 b/g/n (可选 2.4/5GHz)
Bluetooth	BT-V5.0 BLE
Expansion Slot	
Mini_PCIe	3G/4G modular

IO & Connector	
Rear IO	1×DC_IN,DC12V~24V/2A (DC_Jack or 1x4Pin Wafer), 24V for printer
	1×RJ11, Cash box controller
	1×DB9, rs232 (5V Power)
	1×SIM Slot(With card tray)
	1×TF Card Up to 64 GB
	2×USB2.0
	1×USB2.0 OTG
	1×RJ45 10/100 LAN
	1×HDMI
	1×Line-out
Internal Connector	2×LVDS/eDP, 2×Backlight
	1×MIPI_DSI
	8×USB2.0
	1×rs232, 1×TTL, 1×rs485
	1×Speaker port, 2*5W, 8Ω
	2×TP port, I2C Interface
GPIO, 8ch	
Mechanical & Environment	
Dimension	170mm * 96mm
PWR Input	DC12V-24V
Operation	-10~55°C, 10%~90%RH, non-condensing
Storage	-40~75°C, 5%~95%RH, non-condensing
OS	
Android 7.1、Linux4.4	

订购信息:

Product name	Configuration
G-3288-01A	在上述标准配置基础修改电源输入为12V